



Game Boy Screen Replacement

This guide will illustrate how to replace the black and white LCD screen in your original Game Boy.

Written By: Andrew Tramosch



INTRODUCTION

This guide will illustrate how to replace the black and white LCD screen in your original Game Boy. You'll need to know how to solder for this replacement, so be sure to check out iFixit's [soldering technique guide](#).



TOOLS:


- [Phillips #00 Screwdriver](#) (1)
 - [Tri-wing Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Batteries



- Switch your Game Boy off and remove the cartridge.

Step 2

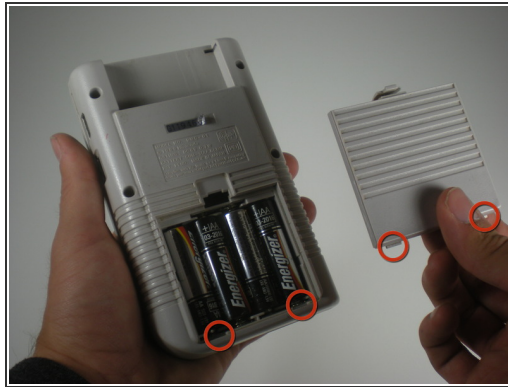


- Use a fingernail (or small coin) to push down on the battery door latch and remove the battery door.
 - ⓘ The release latch is a plastic spring clip. If your Game Boy is getting on in years, be careful as the plastic may be brittle.
 - ★ When you're replacing the cover, be sure to get its two plastic tabs into the slots in the bottom of the battery compartment before pushing the cover back in place.

Step 3




- Use a fingernail to pry each battery outward from the positive (+) terminal to remove them.
- ⚠ Dispose of used batteries properly!
- ⓘ Remove the batteries from your Game Boy before storing it for more than a month or so.

Step 4 — Outer Case

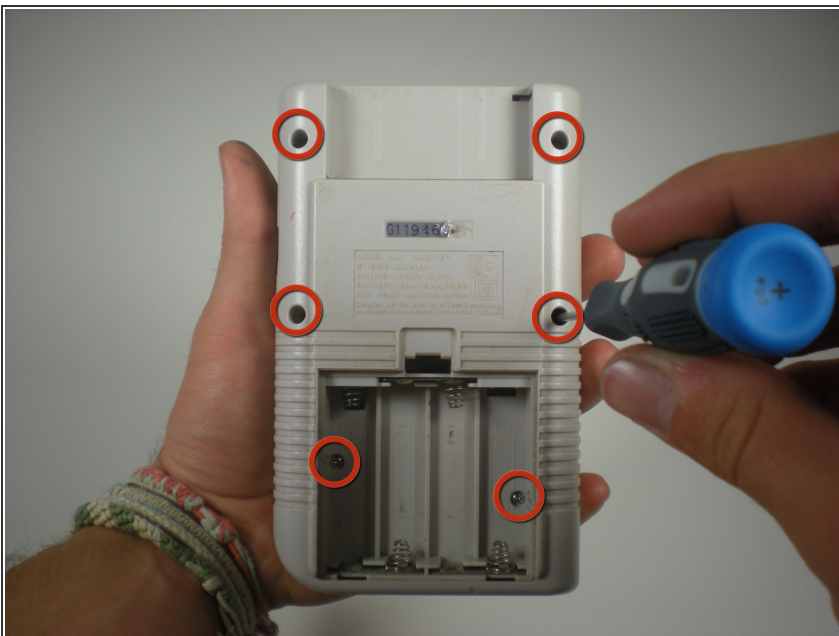

- Remove the six Triwing screws from the back of the device.

Step 5

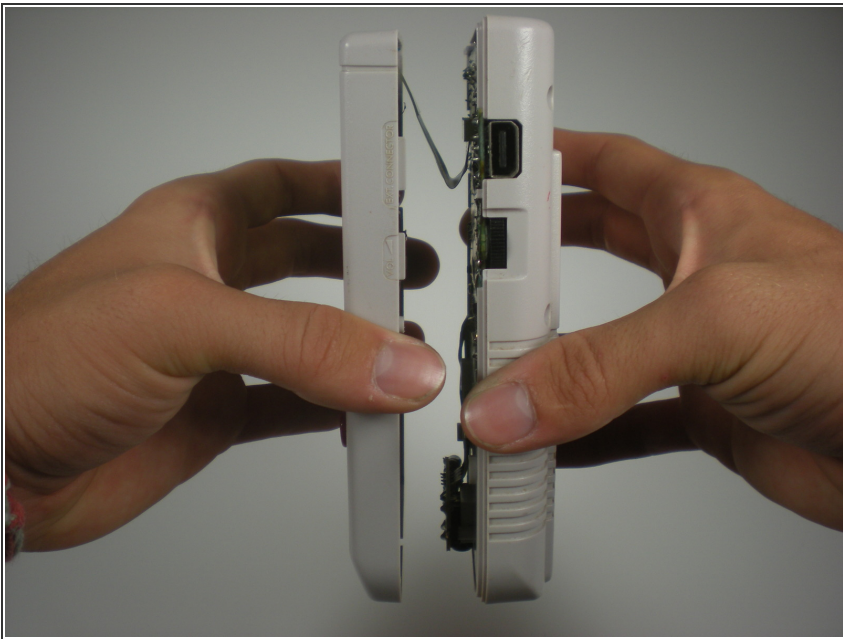

- Gently separate the device's front casing from the back casing after you remove the screws.


⚠ Be careful not to completely separate the casing halves, as they are still joined by a large ribbon cable that may be damaged.

Step 6



- Slide the front side of the casing down to expose the ribbon cable connector.

Step 7

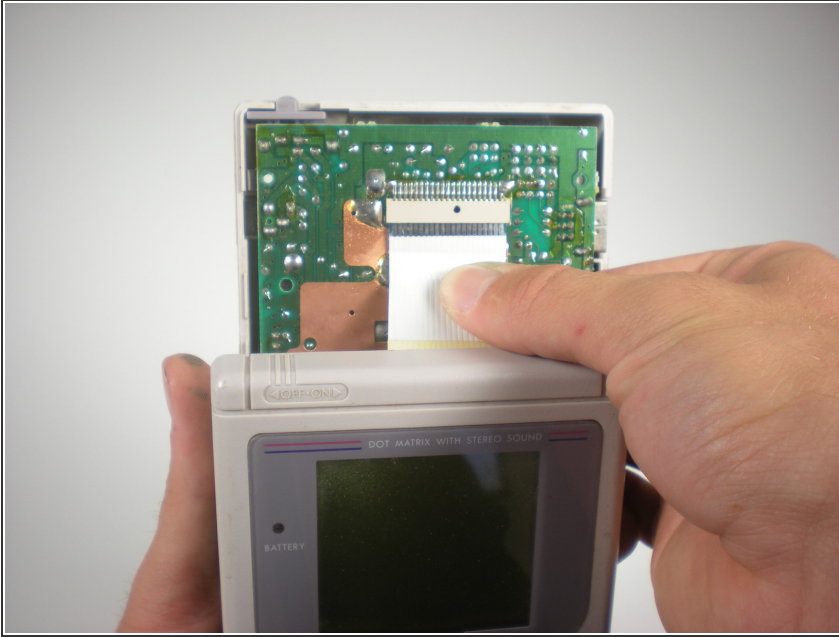



- Grip the ribbon connector with your thumb and forefinger. Pull down gently until the connector, not the ribbon itself, comes out of its socket.
- Separate the front and back casings.

Step 8 — Screen




- Remove the ten screws that connect the circuit board to the outer case.

Step 9

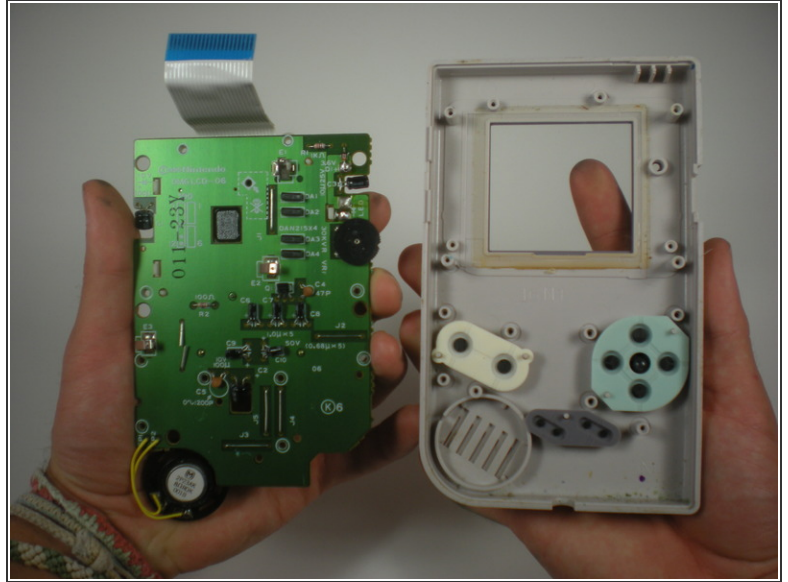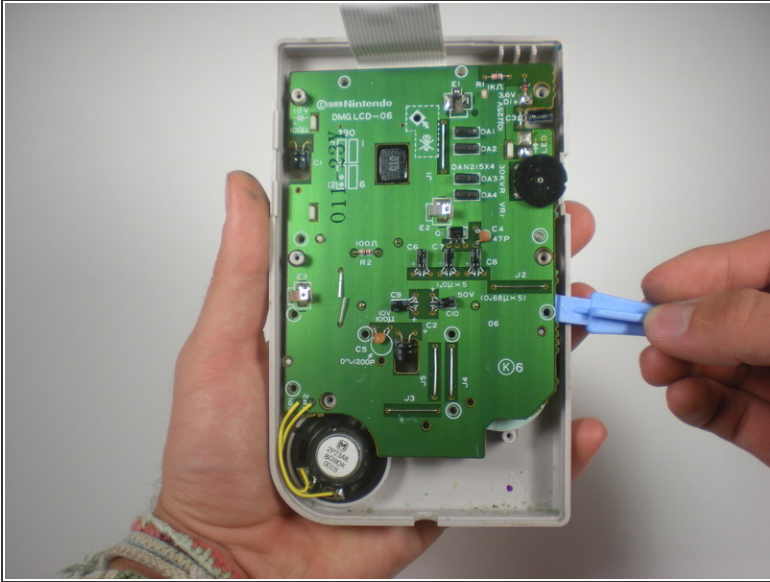


- Remove the circuit board from the outer case using a plastic opening tool.
- ⓘ Take care to gently pry around the entire outside edge of the circuit board until you can easily remove the board without force.

Step 10

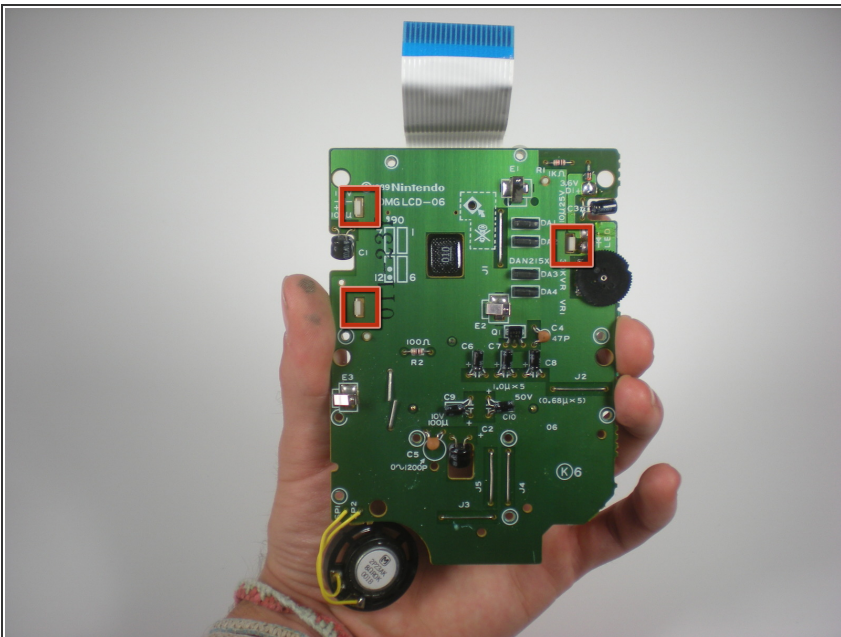


- Disengage the the three plastic clips that secure the screen to the circuit board.

Step 11

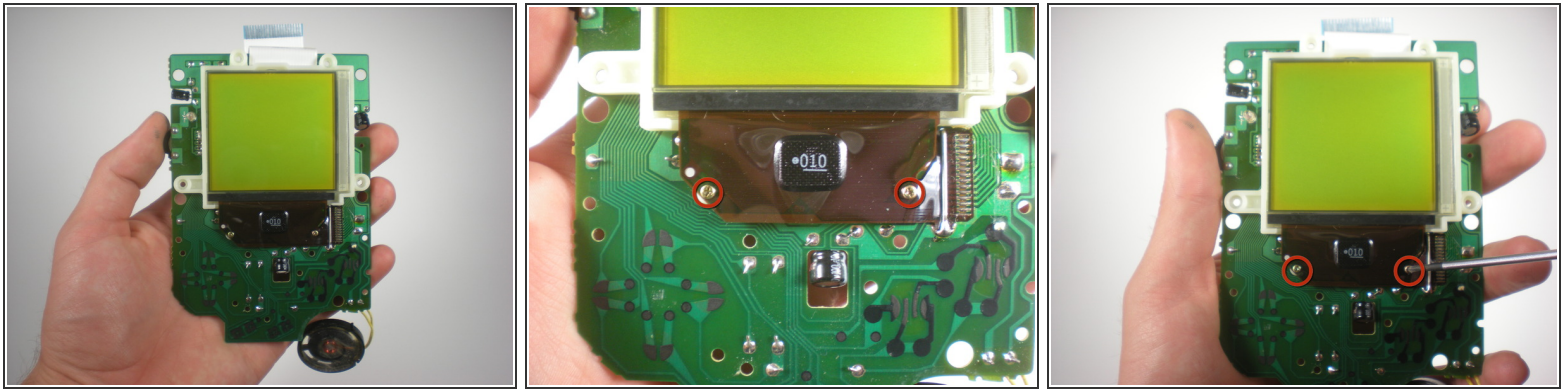

- Flip the circuit board over revealing the device screen.
- Remove the two screws connecting the screen and the circuit board.

Step 12

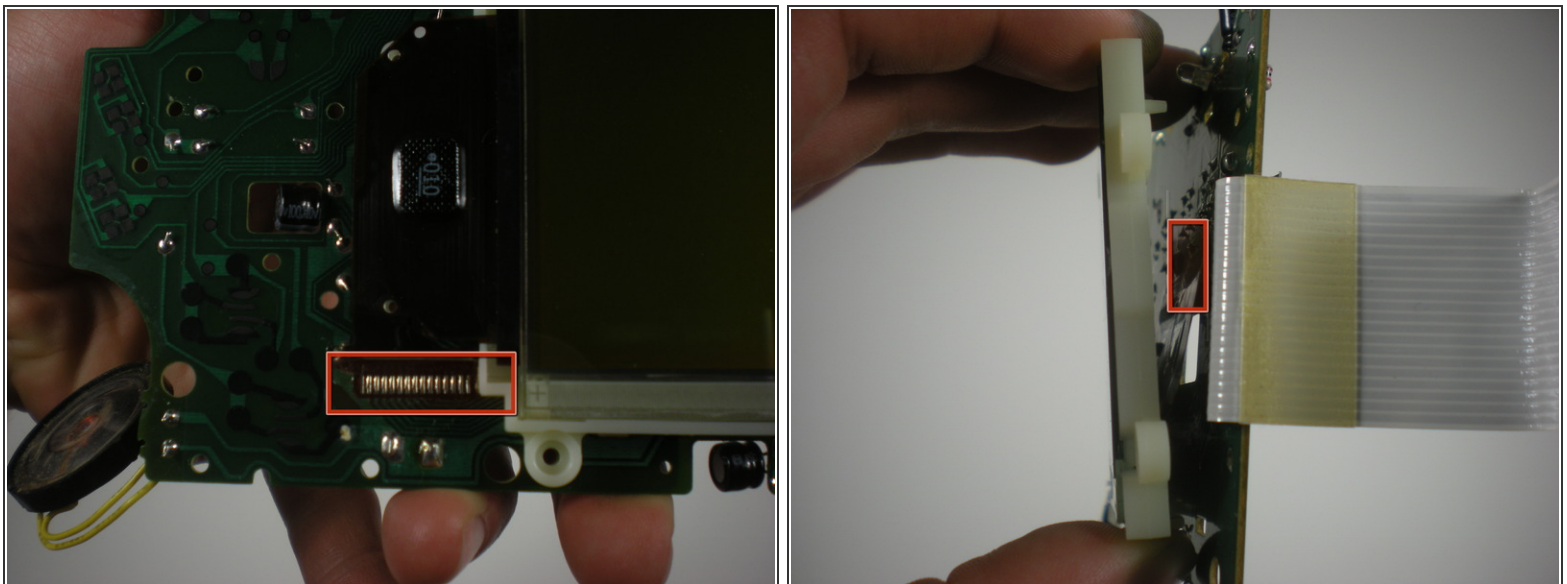

- Desolder each surface mount joint and remove the screen from the circuit board.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-23 08:43:47 AM.